

REVISED: 02 / YEAR: 2018




SOUNDPROOF CURTAIN (CLEAR TYPE)

DESCRIPTION

NSV3C is made of high-density vinyl (thermoplastic polymer) which has excellent electrical and sound insulation properties, making it ideal for use as soundproof curtain in the area or the most in-and-out operation.

ROLL SIZE:

width 1.00 m ; length 10.00 m ; thickness 3 mm



FREQUENCY (Hz)	63	125	250	500	1000	2000	4000	8000
TRANMISSION LOSS (dB)	19	15	19	22	28	32	37	43

APPLICATIONS


- Acoustical rooms & buildings
- Soundproong curtains
- Soundproong walls
- Noise reduction enclosures
- Machines' vibration reduction
- Piping's noise reduction







PROPERTY & ACOUSTIC PERFORMANCE

- Mean sound reduction index 22 dB
- Approx. weight 5 kg/m2
- Tensile strength 2.6 Mpa
- Hardness 90 shore A
- Operating tem. -30 °C to + 65 °C
- Elongation at break 90%



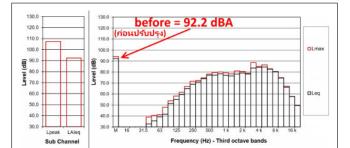



DIN

NOISE BARRIER SHEET - NSV3C / PAGE 1 | 1



NEWTECH INSULATION CO., LTD. 78/97 MOO 8, BANGPOOD, PAKKRED, NONTHABURI, THAILAND 11120

www.noisecontrol365.com
O 2583 8035, O9 8995 4650
facebook.com/newtechinsulation

THAILAND 11120 ⊠ contact@newtechinsulation.com @ instagram.com/newtechinsulatio @ newtech.insulation





